

Non-slip Surface Kit Installation Guide

For M Series and A Series Spa Models

Important:

- Store non-slip aquatic surface pads in a cool, dry indoor location out of direct sunlight until installation.
- **DO NOT** install non-slip aquatic surface pads in temperatures below 60°F (15.6°C).
- Let the spa with installed pads rest for 24 Hours before filling the spa with water.
- Only chlorine-based water care products should be used with Non-slip Aquatic Surface pads.

Preparation:

1. Use isopropyl alcohol and cloth to thoroughly clean spa surface area where pads will be applied. Please follow state and/or country regulations for proper chemical handling.
2. Allow surface area to dry completely.
3. Use isopropyl alcohol and cloth to clean the back of each non-slip aquatic surface pad piece.

Installation:

1. Position non-slip aquatic surface pads in the spa according to model diagram to ensure proper placement.
2. Align the first non-slip aquatic surface piece within the spa surface area and mark the edges with a pencil.
3. Turn the pad over so adhesive paper is face up. With a sharp razor knife, carefully cut the paper from center of the pad towards each edge (center to top, center to bottom). **DO NOT** cut into the non-slip aquatic surface pad.
4. From the center cut, peel each paper edge and fold back to produce a 2" (5 cm) crease.
5. Turn the pad back over and use pencil markings to realign. Use masking tape as needed to secure pad in place.
6. Apply gentle downward pressure to the center of the pad where adhesive is exposed.
7. Lift up one side and peel adhesive paper back towards the edge while gently laying pad on the spa surface.
8. Firmly press down on the pad where the exposed adhesive is. Apply pressure from the center of the pad outward (center to top, center to bottom) to ensure no air is trapped beneath the pad.
9. Continue to lift the pad and peel back paper to expose an additional 2"-3" (5 cm-7.5 cm). Repeat until you reach the edge of the pad. **DO NOT** pull or stretch non-slip aquatic surface pad during this step.
10. Remove masking tape, then repeat steps 8 and 9 for other side of pad.
11. Firmly press down on all edges to ensure no water will permeate the pads. **DO NOT** attempt to remove or adjust placement once non-slip aquatic surface is down.


Water Care Products:

Only chlorine-based water care products should be used with non-slip aquatic surface pads. Bromine-based products can lead to product degradation and will void the products limited warranty. For questions regarding recommended chemicals, customers can contact the manufacturer listed in the product packaging.


Cleaning:

To clean dirt and footprints off non-slip aquatic surface pads, add an all-purpose cleaner, degreaser, or dish soap to warm water and apply with a medium bristled brush. Gently scrub, then rinse with clean water. Repeat if necessary.

M9 Non-slip Aquatic
Surface Layout

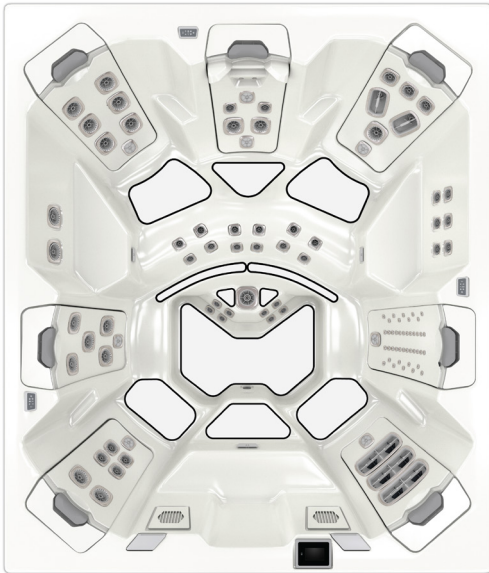

M8 Non-slip Aquatic
Surface Layout

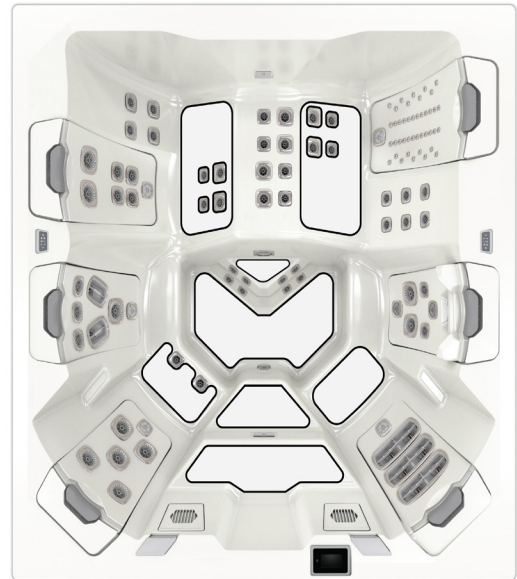

M7 Non-slip Aquatic
Surface Layout



M6 Non-slip Aquatic
Surface Layout



A9L Non-slip Aquatic
Surface Layout



A8L Non-slip Aquatic
Surface Layout



A8 Non-slip Aquatic
Surface Layout



A7L Non-slip Aquatic
Surface Layout



A7D Non-slip Aquatic
Surface Layout



A7 Non-slip Aquatic
Surface Layout



A6L Non-slip Aquatic
Surface Layout



A6 Non-slip Aquatic
Surface Layout



A5L Non-slip Aquatic
Surface Layout

